



유사이드

서울 성북구 하월곡동 39-1, KIST 벤처타운 991 호

Website: www.uside.co.kr

Email: uside@paran.com

TEL : 02-957-8783 FAX : 02-957-8785

2 x 2 Optical Switch

Key Feature

- >Compact Size
- >Built-in position monitoring
- >ROHS compliance



Applications

- >Optical communications
- >Reconfigurable add/drop multiplexers
- >Optical network protection, configuration and restoration
- >Signal loopback
- >Transmission equipment protection

Description

Lightwave Link Fiber Optical Switches are based on Opto-Mechanical technology with proven reliability


With the state-of-the-art technology developed by Lightwave Link, performance of LWL-FOSWs is optimized for a wide range of fiber-optic applications.

Designed is based on worldwide telecommunications, data communications, system monitoring and computer testing requirements.

Fully complied with Telcordia GR-1073-CORE test and complied with applicable items of Telcordia GR-1221-CORE test.



Outline Drawing

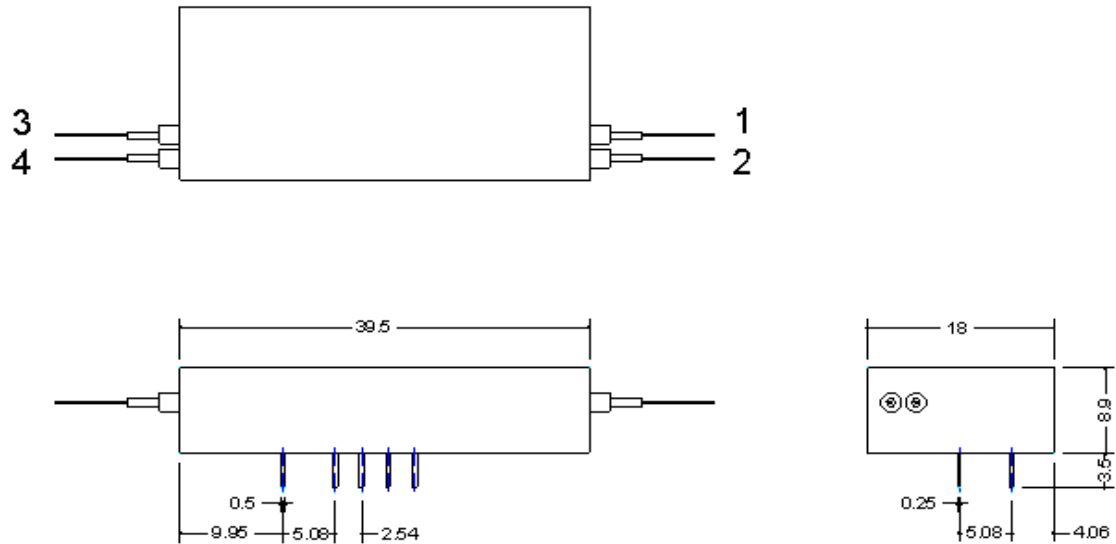

Electrical Characteristics

Specification		
Parameter	Latching	Non-Latching
Coil Resistance (Ω)	125 ($\pm 10\%$)	64.3(10%)
Operating Current (mA), typ.	40	78
Operating Voltage (V), typ.	5.0	
Operating Voltage (V), range	4.5 ~ 5.5	
Power Consumption (mW), typ.*	0.2	0.4

* When +5V DC signal is applied to only one coil.

Electro-Optical Characteristics

Parameter		Specification	
		S.M. fiber	M.M. fiber
Wavelength Range (nm)		1280 ~ 1340	850/1300
		1520 ~ 1625	
Insertion Loss (dB)	Typical	0.6	0.5
	MAX	1.0	0.8
PDL (dB)		≤ 0.1	—
WDL (dB)		≤ 0.3	—
Return Loss (dB)		≤ -45	—
Switching Time (ms)		≤ 5	≤ 10
Crosstalk (dB)		≤ -80	
Repeatability (dB)		≤ 0.1	

Mechanical & Environmental

Parameter	Specification	
	S.M. fiber	M.M. fiber
Operating Temperature Range (°C)	-5 ~ 70	-20 ~ 75
Storage Temperature Range (°C)	-40 ~ 70	
Humidity	5 ~ 85 % RH	
Durability (Cycles)	> 10 ⁷	
Dimension (Hmm×Wmm×Lmm)	8.8×18×39.5	
Weight (g)	< 25	

*All above are general specifications , except custom requirement .