


## **PE10G2i-SR - Dual Port Fiber (SR) 10 Gigabit Ethernet PCI Express Server Adapter Intel® based**

### Introduction

Silicom's 10 Gigabit Ethernet PCI Express server adapters are designed for Servers and high-end appliances. The Silicom 10 Gigabit Ethernet PCI Express Server adapters offer simple integration into any PCI Express X8 to 10Gigabit Networks. The performance is optimized so that system I/O is not the bottleneck in high-performance networking applications.

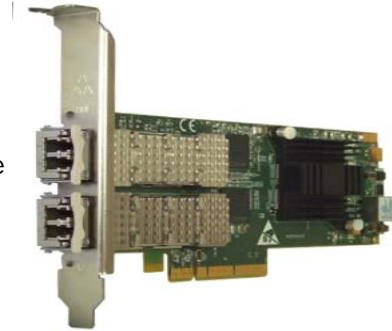

The Silicom 10 Gigabit Ethernet PCI Express server adapters are based on Intel 82598 Ethernet controller with two fully integrated Gigabit Ethernet Media Access Control (MAC) and XAUI ports. In addition to managing MAC and PHY Ethernet layer functions, the controller manages PCI Express packet traffic across its transaction, link, and physical/logical layers. Using hardware acceleration, the controller offloads tasks from the host, such as TCP/UDP/IP checksum calculations and TCP segmentation.

Silicom's 10 Gigabit Ethernet PCI-Express Server adapters are the ideal solution for implementing multiple network segments, mission-critical high-powered networking applications and environments within high performance servers.

### Key features

#### **Fiber 10 Gigabit Ethernet 10GBASE-SR:**

- 10 Gigabit Fiber Ethernet port supports 10GBASE-SR (850nm LAN PHY)
- 10Gigabit 850nm Small form Factor Pluggable (XFP)
- LC Duplex connector.

- Host Interface:
  - PCI Express X8 lane
  - Support PCI Express Base Specification 2.0 (2.5 GHz).
  - Low-Profile Adapter
  - Low power

#### **•Performance Features:**

- IPV6 Supports for IP/ TCP and IP/UDP Receive Checksum offload
- Fragmented UDP checksum offload for Packet Reassembly
- Receive Side Scaling minimize CPU utilization across multiple processor systems
- Support for 16 virtual machine Device Queues ( VMDq) per port
- Support Direct Cache Access ( DCA)
- Advanced memory architecture reduces latency
- Minimized device I/O interrupts using MSI and MSI-X
- Offload of TCP / IP / UDP checksum calculation and TCP segmentation.
- Large on chip receive packet buffer (520 KB)
- Large on chip transmit packet buffer ( 320KB)

• **LAN Features:**

- IEEE 802.x flow control support
- IEEE 802.q VLAN tagging support
- IEEE 802.1p layer 2 priority encoding
- Jumbo Frame (up to 16KB).
- Link Aggregation and Load Balancing.
- RFC2819 RMON MIB statistics
- TCP Segmentation Offload Up to 256KB
- Ipv6 Support for IP/TCP Receive Checksum Offload
- DDP Offload
- LEDs indicator for link/Activity.

**Technical Specifications:**

**Fiber Gigabit Ethernet Technical Specifications - (10GBASE-SR) Adapters**

<b>IEEE Standard / Network topology:</b>	Fiber 10Gigabit Ethernet, 10GBASE-SR (850nm LAN PHY)
<b>Data Transfer Rate:</b>	10.3125GBd
<b>Cables and Operating distance: Up to:</b>	62.5um, 160MHz/Km 26m 62.5um, (OM1)200MHz/Km 33mp 50um, 400MHz/Km 66m 50um, (OM2)500 MHz/Km 82m 50um, (OM3)2000MHz/Km 300m
<b>Output Transmit Power:</b>	Typical: -2.5 dBm Minimum: -3 dBm
<b>Optical Receive Sensitivity:</b>	Typical: -14.5 dBm Maximum: -11.1 dBm
<b>Maximum Input Power:</b>	Maximum: +0.5 dBm

**Operating Systems Support :**

<b>Operating system support:</b>	Windows Linux
----------------------------------	------------------

**PE10G2i-SR**

**PE10G2i-SR: General Technical Specifications**

<b>Interface Standard:</b>	PCI-Express Base Specification Revision 2.0 (2.5GHz)
<b>Board Size:</b>	Low profile add-in card: 167.65mm X 68.91mm (6.60"X 2.713")
<b>PCI Express Card Type:</b>	X8 Lane
<b>PCI Express Voltage</b>	+3.3V +-9%, +12V +- 8%
<b>PCI Connector:</b>	X8 Lane
<b>Controller:</b>	Intel 82598EB
<b>Holder:</b>	Metal Bracket

<b>Weight:</b>	210 gram (7.408 oz)
<b>Power Consumption:</b>	12.66W 1.22 A at 3.3V and 0.72 A at 12V: Typical all ports operate at 10Gbit/s. 12.40W 1.140 A at 3.3V and 0.720 at 12V: Typical No link at all ports 9.59W 0.470 A at 3.3V and 0.670 at 12V: Typical No XFps
<b>Operating Humidity:</b>	0% – 90%, non-condensing
<b>Operating Temperature:</b>	0°C– 50°C (32°F - 122°F)
<b>Storage:</b>	-20°C – 65°C (-4°F – 149°F)
<b>EMC Certifications:</b>	CE EN 55022: 1998 Class B Amendments A1: 2000; A2: 2003 Conducted Emissions Radiated Emissions CE EN 55024: 1998 Amendments A1: 2000; A2: 2003 Immunity for ITE Amendment A1: 2001 CE EN 61000-3-2 2000, Class A Harmonic Current Emissions CE EN 61000 3-3 1995, Amendment A1: 2001 Voltage Fluctuations and Flicker CE IEC 6100-4-2: 1995 ESD Air Discharge 8kV. Contact Discharge 4kV. CE IEC 6100-4-3: 1995 Radiated Immunity (80-1000Mhz), 3V/m 80% A.M. by 1kHz CE IEC 6100-4-4: 1995 EFT/B: Immunity to electrical fast transients 1kV Power Leads, 0.5Kv Signals Leads CE IEC 6100-4-5: 1995 Immunity to conductive surges COM Mode; 2kV, Dif. Mode 1kV CE IEC 6100-4-6: 1996 Conducted immunity (0.15-80 MHz) 3VRMS 80% A.M. By 1kHz CE IEC 6100-4-11: 1994 Voltage Dips and Short Interruptions V reduc >95%, 30% >95% Duration 0.5per, 25per, 250per
<b>MTBF*</b>	60 (Years) *According to Telcordia SR-332 Issue 1 Environmental condition – G <sub>B</sub> (Ground, Fixed, Controlled). Ambient temperature - 25°C. Temperature rise of 10°C above the system ambient temperature was assumed for the cards components

#### PE10G2i-SR : LED / Connector Specifications

<b>LEDs:</b>	LED per port Link /ACT : Turns on link, blinks on activity (green)
<b>LEDs location</b>	LEDs are located on the PCB, visible via holes in the metal bracket holder
<b>Connectors:</b>	LC

**Order Information:**

<b>P/N</b>	<b>Description</b>	<b>Note</b>
<b>PE10G2i-SR</b>	Dual Port Fiber (SR) 10 Gigabit Ethernet PCI Express Server Adapter	X8, Based on Intel 82598EB, Low-profile, on board support for Fiber SR, RoHS compliant

Note: Model P/N -LP  
-LP: Assemble Low Profile Metal Bracket

1V2